



QUICK DAM

THE NEXT GENERATION IN FLOOD PROTECTION™

WATER - GATE SELECTION GUIDE

Location of Protection

The Water-Gate system allows a complete or partial perimeter type of protection by holding back the flood water at a distance from walls rather than protecting individual openings.

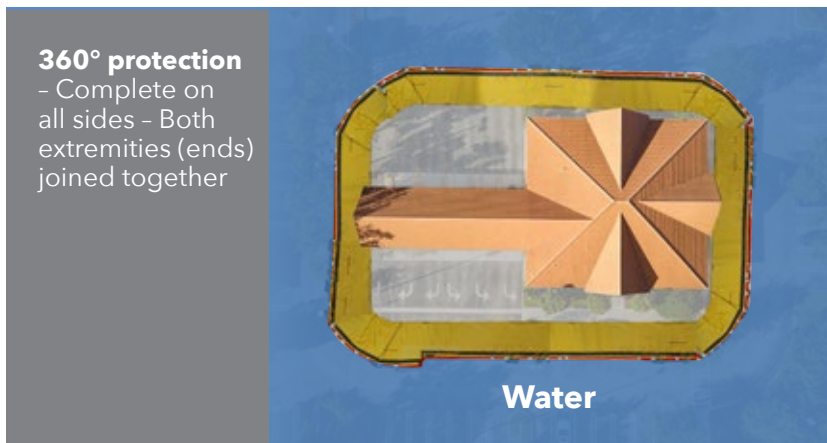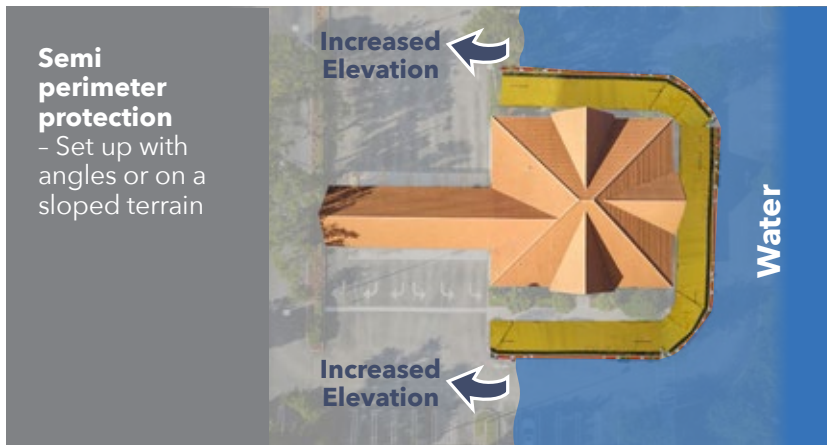

Remember to Use Water Pumps:

Any water collecting between the building and the Water-Gate needs to be evacuated by pumps & hoses. Be sure not to trap water against the property.

Things that can affect the quantity of water behind the barriers are:

- Seepage rate of the barrier when full, approximately 0.5-0.7gpm / ft (inside edge)
- Unpredictable volumes of rain
- Review gutter drainage & make plan to redirect that excess water over the other side of the Water-gate
- Factors affecting the layout of the terrain. ie: gravity, slopes, hills, etc.



